


048 Filament tape cross-weaved

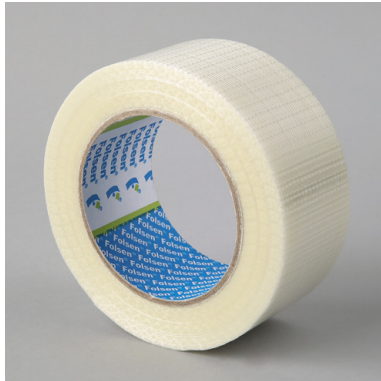

Description:

Bi-oriented polypropylene tape reinforced with crosswave glass fiber able to give a high resistance to breaking loads. Recommended for pallet packing and for high level reinforcements, it is able to allow the maximum loads safety.

Advantages and benefits:

- Excellent adhesion to all surfaces
- Excellent tack
- High tensile strength

Construction:

Backing: Cross Weave fiberglass filament reinforced BOPP

Adhesive: Synthetic rubber and hydrocarbon resins

Color: Clear

Technical Details:

Properties	Unit	Spec.	
Backing thickness	µm	25 ±1,2	AFERA 4006
Total Thickness	µm	135 ±15	AFERA 4006
Peel Adhesion	N/cm	10 ±3	AFERA 5001
Tensile Strength	N/cm	240 ±20	AFERA 5004
Elongation at break	%	5 ±2	AFERA 5004

Availability:

50 mm x 50 m, 50 mm x 330 m

Remark:

Above figures are for reference and cannot be treated as warranties. Customers are advised to test the material to determine the suitability against intended applications. Product must be kept in its original box and in a dry atmosphere away from direct sunlight.

IMPORTANT NOTICE TO PURCHASER

All statements technical information and recommendations contained herein are based on tests we believe to be reliable, but the accuracy or completeness thereof is not guaranteed and the following is made in lieu of all warranties, express or implied: Seller's and manufacturer's only obligation shall be to replace such quantity of the product proved to be defective. Neither seller nor manufacturer shall be liable for any injury, loss or damage, direct or consequential, arising out of the use of or the inability to use the product. Before using, users shall determine the suitability of the product for their intended use, and assume all risk and liability whatsoever in connection therewith. No statement or recommendation not contained herein shall have any force or effect unless in an agreement signed by officers of seller and manufacture.